

Geeignet für folgende Prüfnormen in der Grundkonfiguration:


- ISO 9227 NSS / ASS
- ISO 60068-2-11
- ASTM B 117






Mögliche Erweiterungen

- ISO 6270-2 CH / AT / AHT
 - ISO 11997-1, Zyklus B (VDA 621-415)
 - VW PV1210
 - ISO 60068-2-52
 - SAE J2334
 - Nissan CCT1
 - Volvo 423-0014
- Volvo STD 1027
 - GMW 14872
 - GMW 3172
 - Ford CETP 00.00-L-467 und weitere...

KV-T			500	1000	2000	3000
Prüfraum	Breite [mm]	(w)	1080	1300	1940	2940
	Tiefe [mm]	(d)	660	805	1095	1095
	Höhe [mm] (Prüfraumkante)	(h)	770	770	840	840
	Höhe [mm] (Dachschräge)	(h1)	870	870	940	940
	Höhe [mm] (Giebel)	(h2)	1200	1200	1285	1285
Außen	Breite [mm]	(W)	1940	2160	2800	3800
	Tiefe [mm]	(D)	815	960	1250	1250
	Höhe [mm]	(H)	1435	1435	1505	1505
Dosierpumpen			1	1	1	1
Niederschlagsmenge (regulierbar)			0,5 – 3,0 ml/h			
Sprühdruk (regulierbar)			0,5 – 3,0 bar			
Sprühdüsen			Einstellbare Zweistoffdüse aus PVDF			
Solevorratsbehälter			120l	120l	227l	227l
Gewicht [kg]			380	400	500	600
Material Prüfraum			Edelstahl			
Material Grundkonstruktion			Edelstahl			
Maximale Kammertemperatur			50°C			

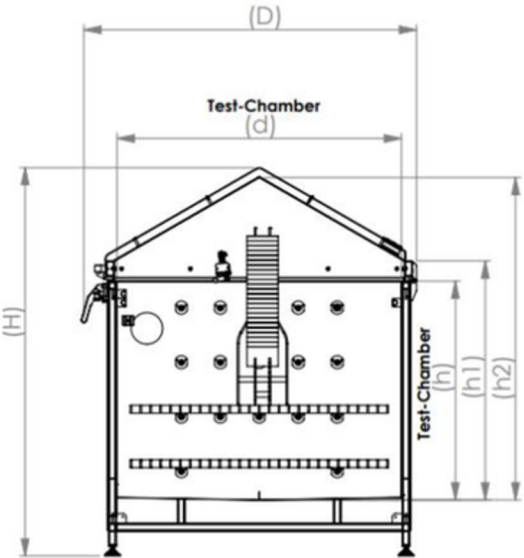

A-A

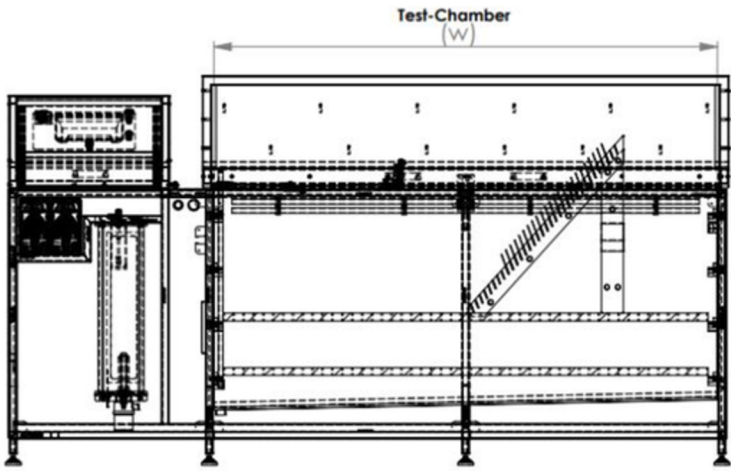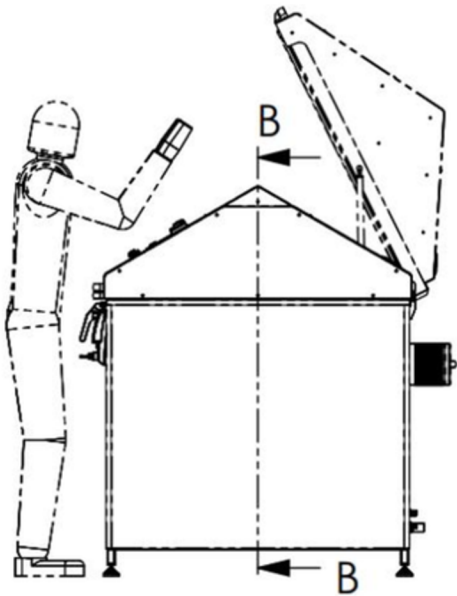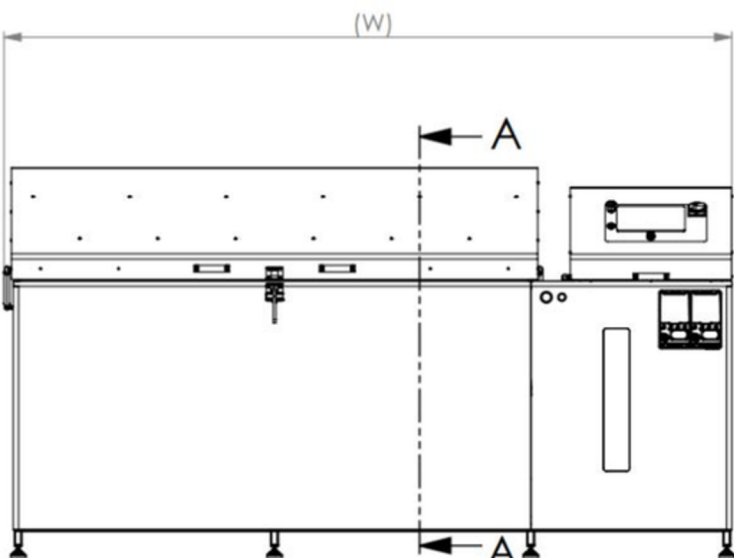

B-B

Suitable for the following test standards in the basic configuration:


- ISO 9227 NSS / ASS
- ISO 60068-2-11
- ASTM B 117






Possible extensions:

- ISO 6270-2 CH / AT / AHT
- ISO 11997-1, Zyklus B (VDA 621-415)
- VW PV1210
- ISO 60068-2-52
- SAE J2334
- Nissan CCT1
- Volvo 423-0014
- Volvo STD 1027
- GMW 14872
- GMW 3172
- Ford CETP 00.00-L-467
- and more...

KV-T			500	1000	2000	3000
Test room	Width [mm]	(In)	1080	1300	1940	2940
	Depth [mm]	(d)	660	805	1095	1095
	Height [mm] (test chamber edge)	(h)	770	770	840	840
	Height [mm] (roof slope)	(h1)	870	870	940	940
	Height [mm] (gable)	(h2)	1200	1200	1285	1285
Outside	Width [mm]	(IN)	1940	2160	2800	3800
	Depth [mm]	(D)	815	960	1250	1250
	Height [mm]	(H)	1435	1435	1505	1505
Dosing pumps			1	1	1	1
Rainfall amount (adjustable)			0,5 – 3,0 ml/h			
Spray pressure (adjustable)			0,5 – 3,0 bar			
Spray nozzles			Adjustable two-fluid nozzle made of PVDF			
brine storage tank			120l	120l	227l	227l
Weight [kg]			380	400	500	600
Material test room			stainless steel			
Basic construction material			stainless steel			
Maximum chamber temperature			50°C			

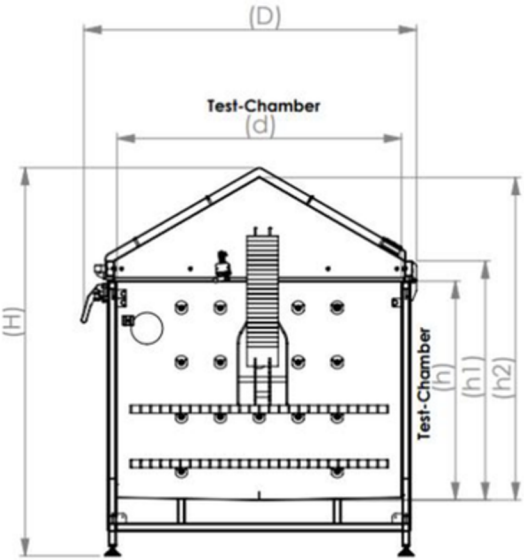

A-A

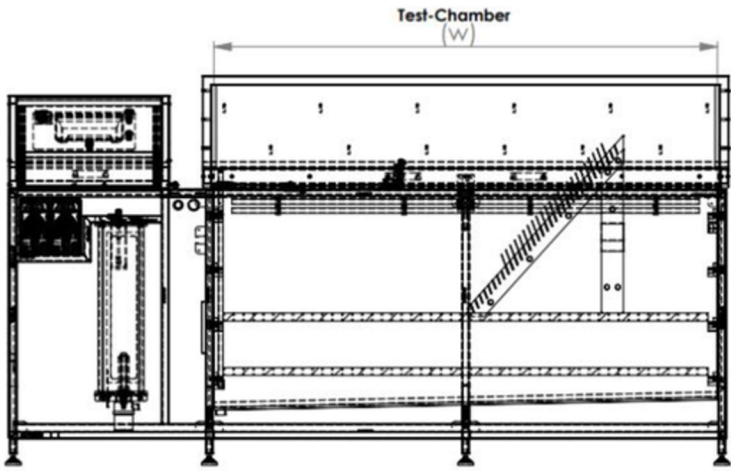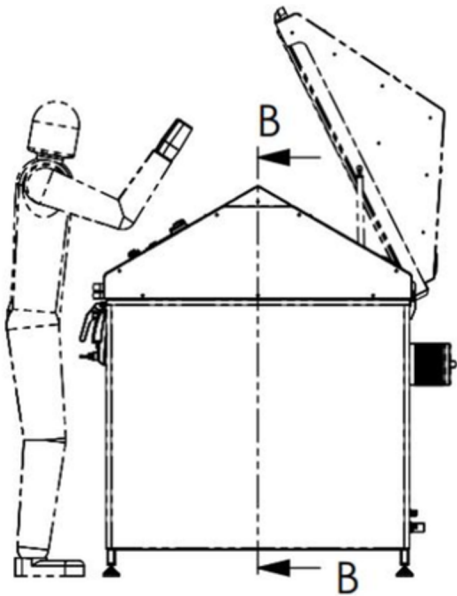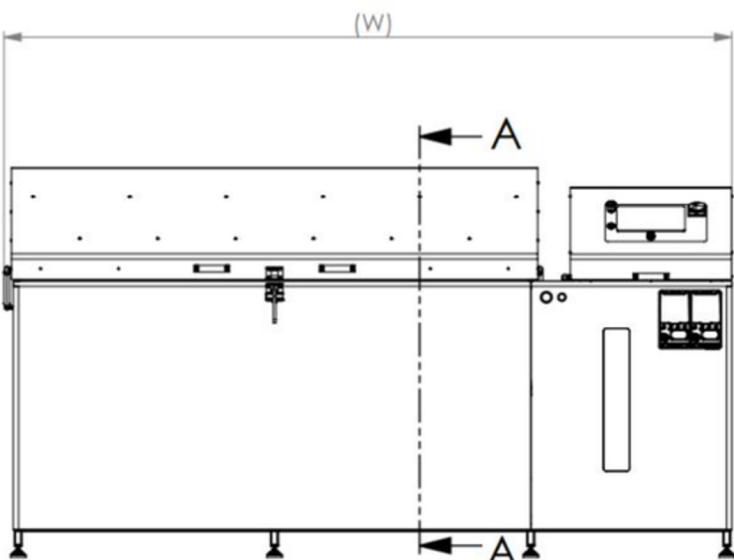

B-B